

# Spray Ring

## Water Effect:

Creates a variety of patterns using adjustable nozzles.

## Performance Characteristics:


Since the Spray Ring utilizes adjustable .187" orifice precision jets to create effects, an in-line Y-strainer is recommended to reduce maintenance.

- Water Level Dependent - No
- Wind Resistance - Fair
- Sound Level - Moderate
- Clogging Potential - Moderate
- Splash Radius - 1.0 to 2.0


Material: Machined brass

Finish: Natural brass

NOTE: Spray Rings supplied with connecting hose and stainless steel hose clamps.

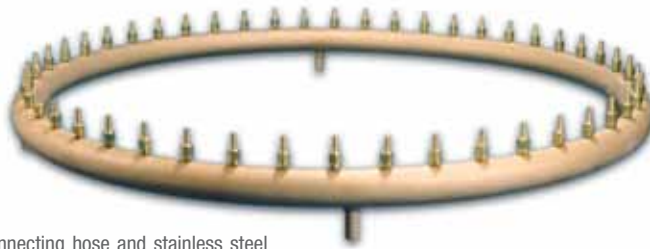

## Detail:

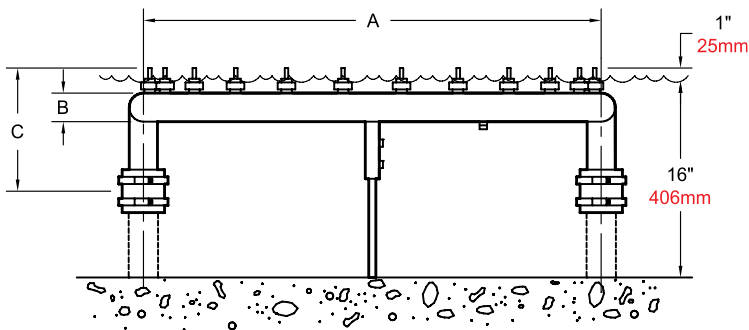

Story | Water | Light | Motion

Fountain People, Inc.  
P.O. Box 807  
San Marcos, TX 78666  
T: 512.392.1155  
F: 512.392.1154  
www.fountainpeople.com

Catalog #	
Details	
Project	
Prepared by	
Date	

# Spray Height:

Model Number	Feet Meters	2 .61	3 .91	4 1.22	5 1.52	6 1.83	8 2.44	10 3.05	12 3.66	14 4.27	16 4.88
EPR-18	GPM (LPM)	18 (69)	25 (95)	32 (122)	34 (129)	35 (133)					
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)					
EPR-24	GPM (LPM)	24 (91)	34 (129)	43 (163)	45 (171)	47 (178)	55 (209)				
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)	12 (.359)				
EPR-30	GPM (LPM)	30 (114)	42 (159)	53 (201)	56 (212)	59 (224)	69 (262)				
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)	12 (.359)				
EPR-36	GPM (LPM)	36 (137)	50 (190)	64 (243)	68 (258)	71 (269)	83 (315)	95 (360)			
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)	12 (.359)	15 (.448)			
EPR-48	GPM (LPM)	48 (182)	67 (254)	85 (322)	90 (341)	94 (356)	110 (417)	127 (481)	148 (561)		
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)	12 (.359)	15 (.448)	18 (.538)		
EPR-60	GPM (LPM)	60 (228)	83 (315)	106 (402)	112 (424)	118 (447)	139 (527)	159 (602)	185 (701)		
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)	12 (.359)	15 (.448)	18 (.538)		
EPR-72	GPM (LPM)	72 (273)	100 (379)	127 (481)	134 (508)	141 (534)	166 (629)	191 (724)	222 (841)	246 (932)	
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)	12 (.359)	15 (.448)	18 (.538)	21 (.628)	
EPR-96	GPM (LPM)	96 (364)	133 (504)	170 (644)	179 (678)	188 (712)	222 (841)	254 (962)	295 (1,117)	327 (1,238)	
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)	12 (.359)	15 (.448)	18 (.538)	21 (.628)	
EPR-120	GPM (LPM)	120 (455)	166 (629)	212 (803)	224 (848)	235 (890)	277 (1,049)	318 (1,204)	369 (1,397)	409 (1,549)	435 (1,647)
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)	12 (.359)	15 (.448)	18 (.538)	21 (.628)	25 (.747)
EPR-180	GPM (LPM)	180 (682)	249 (943)	318 (1,204)	336 (1,272)	353 (1,337)	415 (1,571)	477 (1,806)	554 (2,098)	614 (2,325)	652 (2,469)
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)	12 (.359)	15 (.448)	18 (.538)	21 (.628)	25 (.747)
EPR-240	GPM (LPM)	36 (909)	50 (1,261)	64 (1,609)	68 (1,696)	71 (1,783)	83 (2,098)	95 (2,408)	36 (2,794)	50 (3,097)	64 (3,290)
	Head Ft. (Bar)	3 (.090)	4.5 (.135)	6 (.179)	7.5 (.224)	9 (.269)	12 (.359)	15 (.448)	18 (.538)	21 (.628)	25 (.747)

## Dimensions

Model Number	Inlet		Number of			Flush Plugs		Number of Legs	
	Qty	Size	A - Ft (m)	B - In (mm)	C - In (mm)	Jets	Qty		Size
EPR-18	1	1½"	1.5 (.46)	1½ (38)	6½ (165)	18	1	½"	2
EPR-24	2	1½"	2 (.61)	1½ (38)	6½ (165)	24	1	½"	2
EPR-30	2	1½"	2.5 (.76)	1½ (38)	6½ (165)	30	1	½"	2
EPR-36	2	1½"	3 (.91)	1½ (38)	6½ (165)	36	1	½"	2
EPR-48	2	2"	4 (1.22)	2 (51)	6½ (165)	48	1	½"	2
EPR-60	2	2"	5 (1.52)	2 (51)	7 (178)	60	1	½"	2
EPR-72	4	2"	6 (1.83)	2 (51)	7 (178)	72	2	½"	4
EPR-96	4	2"	8 (2.44)	2 (51)	7 (178)	96	2	½"	4
EPR-120	4	2"	10 (3.05)	2 (51)	7 (178)	120	2	½"	4
EPR-180	6	2"	15 (4.57)	2 (51)	7 (178)	180	3	½"	6
EPR-240	8	2"	20 (6.10)	2 (51)	7 (178)	240	4	½"	8

Highlighted sections indicate optimum performance

Catalog #	
Details	
Project	
Prepared by	
Date	



fountain people

Story | Water | Light | Motion

Fountain People, Inc.  
 P.O. Box 807  
 San Marcos, TX 78666  
 T: 512.392.1155  
 F: 512.392.1154  
 www.fountainpeople.com